

## Openwork slab

**Openwork slabs** are available in two options: standard 40 × 60 cm and mini 30 × 45 cm. They are a response to the growing interest in **ecology**. Each surface, regardless of what it is made of, means more or less interference with the natural environment. The tighter the material is on the street, pavement, alley or square, the more difficult it is for rainwater to penetrate the soil. The answer to pro-ecological needs seems to be materials that allow for the creation of a **compact, hardened and durable** surface on the one hand, and on the other hand that **perfectly integrate with the surroundings and ensure free drainage** of rainwater to the soil. Openwork slabs are an element used in the creation of **parking lots, squares, strengtening of slopes or biologically active surfaces**. They have characteristic **cutouts** in the perimeter and through **holes** inside the element. They are considered to be ecological, because the holes in them are usually **filled with grass or fine aggregate**.



## Color chart

### Standard



szary



**Attention: Colours with a phone icon: Only on order product.**

## Recommendations and information:

Do not use with a load of more than 3.5 t. Use with a traffic load of up to 3.5 t is subject to the roadbase being constructed in accordance with the manufacturer's guidelines contained in the product documentation. All surfaces should be executed in accordance with the guidelines of the Minister of Transport (Catalogue WR-D-63). Product should be laid only on a sand or sand cement bedding.

**Bevel:** classic dimation


**Spacers:** spacers-free

**Joint width:** 3 – 5 mm

**Production:** made with the use of the two-ply technology

**Attention: For technological reasons pallet's weight may change.**

## Shapes and dimensions

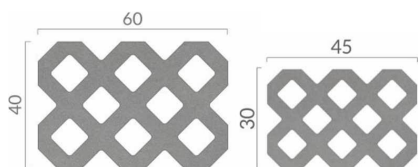

# Product details

- Number of elements in the system:** 1
- Appearance:** flat surface and straight edges, 2 sizes
- Thickness (cm):** 8, 10
- Format:** big
- Shape:** rectangle, przelotowe otwory, wcięcia w obwodzie
- Designation:** driveways and car parks, walkways, terraces, garden/paths/alleys, eco, reinforcement of slopes
- Loads:** vehicle traffic: load up to 3,5 t, pedestrian traffic
- Material:** vibro-pressed concrete

# Logistic data

Pallet weight [kg]		Number of m2 per pallet	
1360:	standard	9,6:	standard
1020:	mini	9,72:	mini
Number of layers per pallet		Number of pieces per pallet	
8:	standard	40 pcs:	standard
9:	mini	72 pcs:	mini

See the product online on your smartphone

